

PRODUCT COMBINATIONS

CONTINUUM + **FLINT**
BY FLINT HI-FLOOR

Combine two technical pavements of different features, with the same aesthetic and obtain a continuous and perfect installation.

FLINT

In order to enjoy a global experience under your feet we must maintain a correct union between your slats and we will obtain a continuous and perfect installation.

CONTINUUM by FLINT + FLINT HI-FLOOR are two technical floorings of different features that maintain the same aesthetic.

In any of its spaces and according to your needs you can combine CONTINUUM by FLINT and FLINT HI-FLOOR and the result of total visual continuity of the pavement will surprise you.

Either, in areas with 100% Waterproof or high wear needs, such as kitchens, bathrooms, hotels, shops, public spaces ..., we will apply FLINT HI-FLOOR and in adjoining areas and spaces without water protection needs, we can use CONTINUUM BY FLINT, always with the same aesthetic and without the transitions being appreciated.




Toda la información sobre la correcta unión entre lamas

Clipping of the CONTINUUM by FLINT slats and FLINT HI-FLOOR slats in the transition zones between materials.

1. Before Clipping

Before joining CONTINUUM, in the transition zone where the first row of CONTINUUM by FLINT slats is joined with the first row of FLINT HI-FLOOR slats, **it is mandatory to glue the slats on the side using the polyurethane adhesive Ref. 089004.000600**, which will be supplied and billed in combined orders FLINT HI-FLOOR + CONTINUUM by FLINT. In the rest of the installation the slats should not be glued, it is obligatory only in the first row of transition between both pavements.

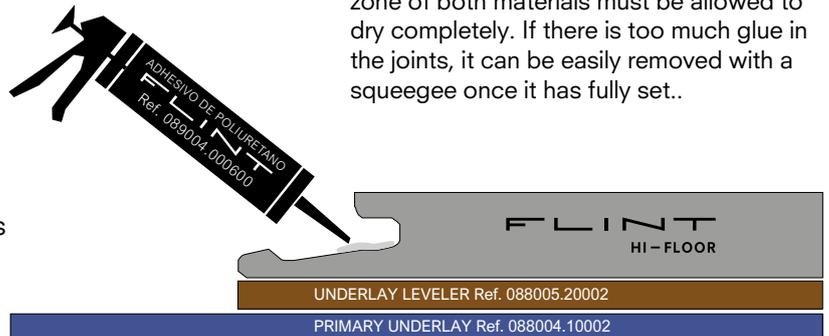


IMPORTANT:
The polyurethane glue applied to the FLINT and CONTINUUM slats in the transition zone of both materials must be allowed to dry completely. If there is too much glue in the joints, it can be easily removed with a squeegee once it has fully set..

2. Clipping

To achieve a correct clipping, it must be positioned at about 20° to 30° inclination and join the CONTINUUM by FLINT to the FLINT HI-FLOOR blade. Subsequently make a slight tension between the slats and lower to achieve the desired clipping.

To achieve easy clipping, the male (Continuum) must fit perfectly into the female (Flint) before applying tension.


Fitting the male inside the female can unduly damage the CONTINUUM by FLINT blade as it is a softer material than FLINT HI-FLOOR.

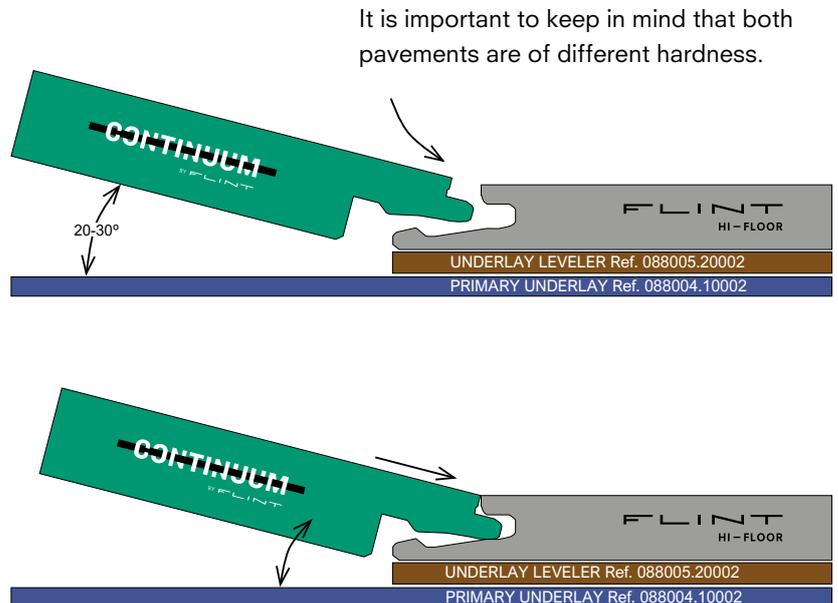

It is important to keep in mind that both pavements are of different hardness.

3. Total continuity

To achieve a total visual continuity of the two surfaces, we recommend a layout of the slats in which the union between them is executed on the long side. In this way the fixing using the clipping between slats is priceless.

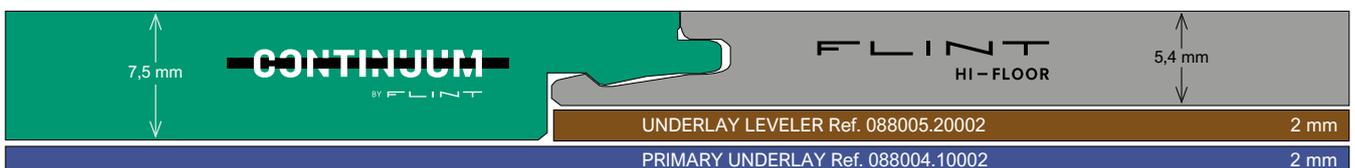

COMBINED FACILITIES

FLINT HI-FLOOR AND CONTINUUM by FLINT pavements allow combined installations, in which the two surfaces are joined to achieve a total visual continuity of the pavement.

Depending on the needs of the space we can apply in a FLINT HI-FLOOR area and in another area adjacent to it, CONTINUUM by FLINT, making the transition between the two products is negligible.


FLINT HI-FLOOR is 100% Water-proof offers maximum water tightness, which allows installation in wet areas or requiring intensive cleaning such as bathrooms, kitchens, wellness areas, gyms, ... This typology of spaces usually has contiguous spaces where 100% protection against water is not necessary, such as dining rooms, living rooms, bedrooms, auxiliary rooms, ..., spaces in which CONTINUUM by FLINT offers the same surface resistance in front of to the desgate. Two technical pavements of different features, with the same aesthetic, for a continuous and perfect installation.

It is mandatory to use the Primary Underlay both in the area to be installed FLINT HI-FLOOR and in the CONTINUUM by FLINT zone. Start the installation by the area where you will install FLINT HI-FLOOR, using the Leveling Underlay Ref. 088005.20002 on the Primary Underlay Ref. 088004.10002, which will allow you to save the difference in thickness of both pavements.

Then follow the general installation instructions supplied with the product.


Finish the entire installation area FLINT HI-FLOOR and from the final slats that define the border between the two zones, start the installation of CONTINUUM by FLINT.

The CONTINUUM by FLINT slats are fixed to the FLINT HI-FLOOR slats with ease by having the same manual clipping system. Complete the rest of the installation of the CONTINUUM by FLINT area following the general instructions supplied with the product.

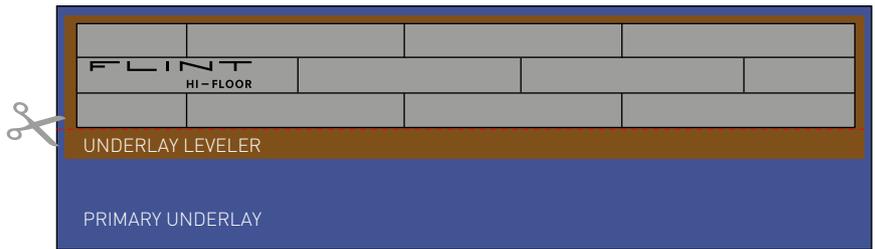

Union with clipping

To achieve a total visual continuity of the two surfaces, we recommend a layout of the slats in which the union between them is executed on the long side. In this way the fixing using the clipping between slats will be invaluable.

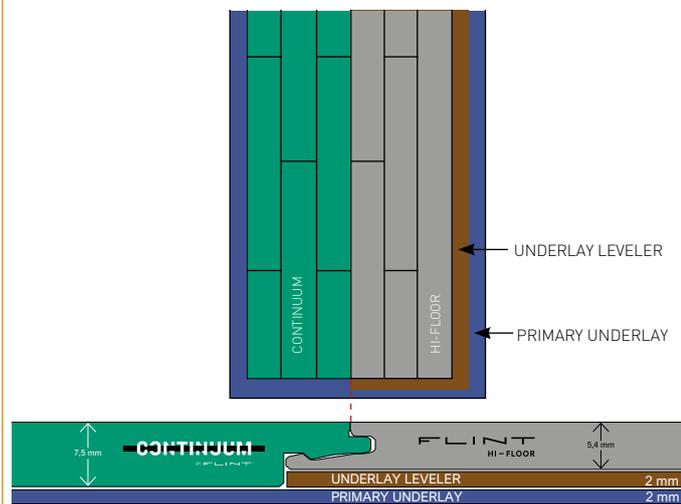

Union with expansion joint

If instead opts for an installation where the joint between slats is executed on the short side, you should leave a small expansion joint that we will cover later with the transition joint FLINT, which is available in the same finishes as the pavement. integrates visually.

